



BEVELL OUTSIDE EDGE AT 45° TO 1/8" DEEP

THREE

APPROX.

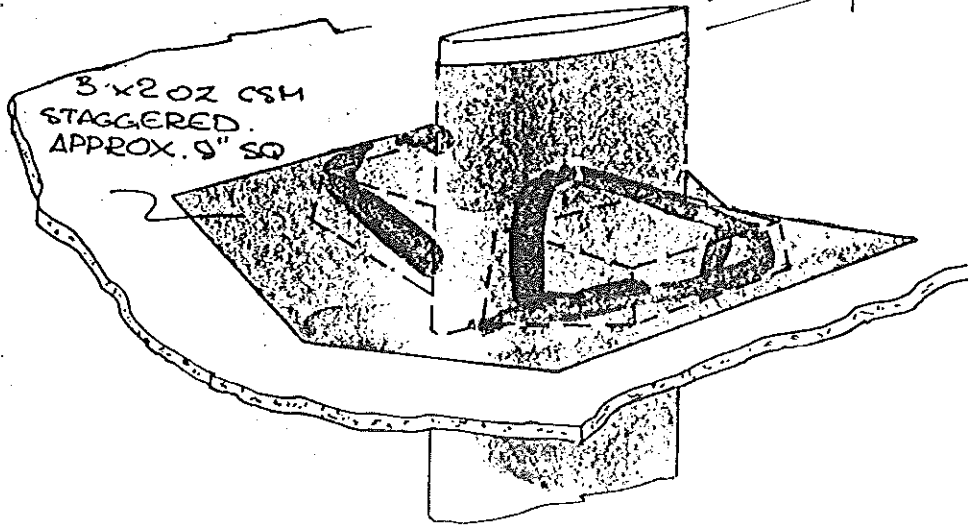

TWO STEEL PINS

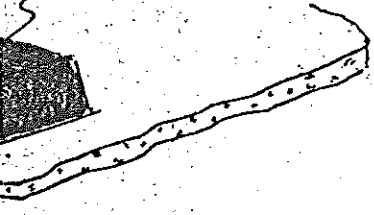


S SUPPLY 2
APPROX 9"x4 1/2"

UNCONTROLLED

FOUR

SECTION LOOKING FORWARD THROUGH 'P' BRACKET & HARDWOOD BLOCKS

ISSUED BY
GEORGE PROJECTS
DRAWING OFFICE
02 JAN 1998

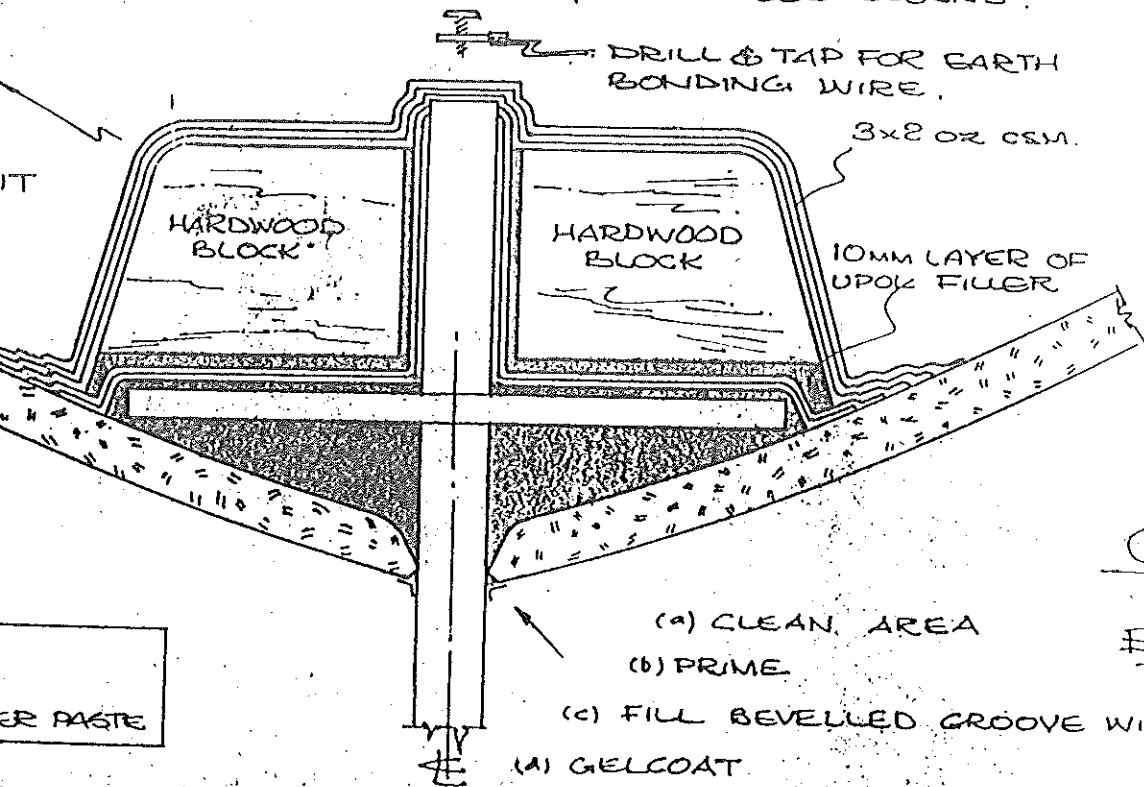

DRILL & TAP FOR EARTH BONDING WIRE

3x8 oz CSM

HARDWOOD BLOCK

HARDWOOD BLOCK

10mm LAYER OF UPOK FILLER

- (a) CLEAN AREA
- (b) PRIME

(c) FILL BEVELLED GROOVE WITH P.F.P.

(d) GELCOAT

George Taylor
18/1/98
George Taylor